


Thread form (THFT)										
Basic standard group (BSG)		BS 1127:1950	BS 1127:1950	BS 1127:1950	BS 1127:1950	BS 1127:1950	DIN 382	BS 1127:1950	BS 1127:1950	DIN 382
Thread tolerance class (TCTR)							6g	6g	6g	Class A
Die chamfer to pitch ratio (DCPR)		1.75 XP	1.75 XP	1.75 XP	1.75 XP	1.75 XP	1.75 XP	1.75 XP	1.75 XP	1.75 XP
Material code (BMC)		HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS
Hand (Cutting direction)										
Coating										
Product Family Code		F300	F310	F320	F330	F370	F202	F302	F312	F272
PSF cutting diameters range		M2 – M36	M3 – M30	No.4 – 1.1/4	No.4 – 1.1/2	1/8 – 1.1/2	M3 – M36	M3 – M36	M8 – M24	1/8 – 1.1/2
P	P1	■	■	■	■	■	■	■	■	■
	P2	■	■	■	■	■	■	■	■	■
	P3	▣	▣	▣	▣	▣	▣	▣	▣	▣
	P4	▣	▣	▣	▣	▣	▣	▣	▣	▣
M	M1	■	■	■	■	■	■	■	■	■
	M2	▣	▣	▣	▣	▣	▣	▣	▣	▣
	M3									
	M4									
K	K1	■	■	■	■	■	■	■	■	■
	K2	■	■	■	■	■	■	■	■	■
	K3	■	■	■	■	■	■	■	■	■
	K4									
	K5	■	■	■	■	■	■	■	■	■
N	N1	▣	▣	▣	▣	▣	▣	▣	▣	▣
	N2	▣	▣	▣	▣	▣	▣	▣	▣	▣
	N3	▣	▣	▣	▣	▣	▣	▣	▣	▣
	N4	▣	▣	▣	▣	▣	▣	▣	▣	▣
	N5									
S	S1									
	S2									
	S3									
	S4									
H	H1									
	H2									
	H3									
	H4									

F300



HSS Adjustable Split Hand Die, Metric, Right Hand

Split die to produce external thread by hand in multiple passes, adjusting each pass. By tightening the die stock holder, different classes of thread fit can be achieved - tight, regular or loose fit. Slightly tightened in the holder, it can be used to clean up or produce a partial thread.



M	BS 1127:1950	1.75 XP
HSS	R	Bright

Workpiece material group suitability and starting values for cutting speed (m/min).

P1.1 ■ 12	P1.2 ■ 13	P1.3 ■ 14	P2.1 ■ 10	P2.2 ■ 9	P2.3 ▣ 8	P3.1 ■ 8	P3.2 ▣ 7	P4.1 ▣ 5	M1.1 ■ 7	M1.2 ■ 6	M2.1 ■ 6	M2.2 ▣ 5	K1.1 ■ 11
K1.2 ■ 8	K1.3 ▣ 6	K2.1 ■ 11	K2.2 ■ 9	K2.3 ▣ 7	K3.1 ■ 10	K3.2 ■ 8	K3.3 ▣ 6	K5.1 ■ 10	K5.2 ■ 8	K5.3 ▣ 6	N1.1 ▣ 20	N1.2 ▣ 15	N1.3 ▣ 10
N2.1 ▣ 10	N2.2 ▣ 9	N2.3 ▣ 6	N3.1 ■ 11	N3.2 ▣ 6	N3.3 ▣ 3	N4.1 ▣ 11	N4.2 ▣ 4	N4.3 ▣ 4					

Products from this series are also available in set with taps. Please see L120.

Product	TD (mm)	TP (mm)	BD (inch)	OAL (inch)
F300M2X13/16	2.00	0.40	13/16	1/4
F300M2.5X13/16	2.50	0.45	13/16	1/4
F300M3X13/16	3.00	0.50	13/16	1/4
F300M3.5X13/16	3.50	0.60	13/16	1/4
F300M4X13/16	4.00	0.70	13/16	1/4
F300M5X13/16	5.00	0.80	13/16	1/4
F300M6X13/16	6.00	1.00	13/16	1/4
F300M6X1	6.00	1.00	1"	3/8
F300M7X13/16	7.00	1.00	13/16	1/4
F300M7X1	7.00	1.00	1"	3/8
F300M8X1	8.00	1.25	1"	3/8
F300M8X1.5/16	8.00	1.25	1.5/16	7/16
F300M9X1	9.00	1.25	1"	3/8
F300M9X1.5/16	9.00	1.25	1.5/16	7/16


Product	TD (mm)	TP (mm)	BD (inch)	OAL (inch)
F300M10X1	10.00	1.50	1"	3/8
F300M10X1.5/16	10.00	1.50	1.5/16	7/16
F300M11X1.5/16	11.00	1.50	1.5/16	7/16
F300M12X1.5/16	12.00	1.75	1.5/16	7/16
F300M14X1.5/16	14.00	2.00	1.5/16	7/16
F300M16X1.1/2	16.00	2.00	1.1/2	1/2
F300M18X1.1/2	18.00	2.50	1.1/2	1/2
F300M20X1.1/2	20.00	2.50	1.1/2	1/2
F300M22X2	22.00	2.50	2"	5/8
F300M24X2	24.00	3.00	2"	5/8
F300M27X3	27.00	3.00	3"	7/8
F300M30X3	30.00	3.50	3"	7/8
F300M36X3	36.00	4.00	3"	7/8

F310



HSS Adjustable Split Hand Die, Metric Fine, Right Hand

Split die to produce external thread by hand in multiple passes, adjusting each pass. By tightening the die stock holder, different classes of thread fit can be achieved - tight, regular or loose fit. Slightly tightened in the holder, it can be used to clean up or produce a partial thread.



MF	BS 1127:1950	1.75 XP
HSS	R	Bright

Workpiece material group suitability and starting values for cutting speed (m/min).

P1.1 ■ 12	P1.2 ■ 13	P1.3 ■ 14	P2.1 ■ 10	P2.2 ■ 9	P2.3 ■ 8	P3.1 ■ 8	P3.2 ■ 7	P4.1 ■ 5	M1.1 ■ 7	M1.2 ■ 6	M2.1 ■ 6	M2.2 ■ 5	K1.1 ■ 11
K1.2 ■ 8	K1.3 ■ 6	K2.1 ■ 11	K2.2 ■ 9	K2.3 ■ 7	K3.1 ■ 10	K3.2 ■ 8	K3.3 ■ 6	K5.1 ■ 10	K5.2 ■ 8	K5.3 ■ 6	N1.1 ■ 20	N1.2 ■ 15	N1.3 ■ 10
N2.1 ■ 10	N2.2 ■ 9	N2.3 ■ 6	N3.1 ■ 11	N3.2 ■ 6	N3.3 ■ 3	N4.1 ■ 11	N4.2 ■ 4	N4.3 ■ 4					

Product	TD (mm)	TP (mm)	BD (inch)	OAL (inch)
F310M3X.35X13/16	3.00	0.35	13/16	1/4
F310M4X.5X13/16	4.00	0.50	13/16	1/4
F310M4X.75X13/16	4.00	0.75	13/16	1/4
F310M5X.5X13/16	5.00	0.50	13/16	1/4
F310M5X.9X13/16	5.00	0.90	13/16	1/4
F310M6X.75X13/16	6.00	0.75	13/16	1/4
F310M8X.75X1	8.00	0.75	1"	3/8
F310M8X1.0X1	8.00	1.00	1"	3/8
F310M9X1.0X1	9.00	1.00	1"	3/8
F310M10X.75X1	10.00	0.75	1"	3/8
F310M10X1.0X1	10.00	1.00	1"	3/8
F310M10X1.25X1	10.00	1.25	1"	3/8
F310M10X1.25X1.5/16	10.00	1.25	1.5/16	7/16
F310M12X1.0X1.5/16	12.00	1.00	1.5/16	7/16
F310M12X1.25X1.5/16	12.00	1.25	1.5/16	7/16


Product	TD (mm)	TP (mm)	BD (inch)	OAL (inch)
F310M12X1.5X1.5/16	12.00	1.50	1.5/16	7/16
F310M14X1.25X1.5/16	14.00	1.25	1.5/16	7/16
F310M14X1.5X1.5/16	14.00	1.50	1.5/16	7/16
F310M16X1.0X1.1/2	16.00	1.00	1.1/2	1/2
F310M16X1.5X1.1/2	16.00	1.50	1.1/2	1/2
F310M18X1.5X1.1/2	18.00	1.50	1.1/2	1/2
F310M20X1.0X1.1/2	20.00	1.00	1.1/2	1/2
F310M20X1.5X2	20.00	1.50	2"	5/8
F310M20X2.0X1.1/2	20.00	2.00	1.1/2	1/2
F310M22X1.5X2	22.00	1.50	2"	5/8
F310M24X1.5X2	24.00	1.50	2"	5/8
F310M24X2.0X2	24.00	2.00	2"	5/8
F310M25X1.5X2	25.00	1.50	2"	5/8
F310M27X2.0X2.1/4	27.00	2.00	2.1/4	11/16
F310M30X2.0X2.1/4	30.00	2.00	2.1/4	11/16

F320



HSS Adjustable Split Hand Die, UNC, Right Hand

Split die to produce external thread by hand in multiple passes, adjusting each pass. By tightening the die stock holder, different classes of thread fit can be achieved - tight, regular or loose fit. Slightly tightened in the holder it can be used to clean up or produce a partial thread.



UNC	BS 1127:1950	1.75 XP
HSS	R	Bright

Workpiece material group suitability and starting values for cutting speed (m/min).

P1.1 ■ 12	P1.2 ■ 13	P1.3 ■ 14	P2.1 ■ 10	P2.2 ■ 9	P2.3 ■ 8	P3.1 ■ 8	P3.2 ■ 7	P4.1 ■ 5	M1.1 ■ 7	M1.2 ■ 6	M2.1 ■ 6	M2.2 ■ 5	K1.1 ■ 11
K1.2 ■ 8	K1.3 ■ 6	K2.1 ■ 11	K2.2 ■ 9	K2.3 ■ 7	K3.1 ■ 10	K3.2 ■ 8	K3.3 ■ 6	K5.1 ■ 10	K5.2 ■ 8	K5.3 ■ 6	N1.1 ■ 20	N1.2 ■ 15	N1.3 ■ 10
N2.1 ■ 10	N2.2 ■ 9	N2.3 ■ 6	N3.1 ■ 11	N3.2 ■ 6	N3.3 ■ 3	N4.1 ■ 11	N4.2 ■ 4	N4.3 ■ 4					

Products from this series are also available in set with taps. Please see L120.

Product	TDZ	TPI	TD	BD	OAL
			(mm)	(inch)	(inch)
F3204-40X13/16	4	40	2.85	13/16	1/4
F3205-40X13/16	5	40	3.18	13/16	1/4
F3206-32X13/16	6	32	3.51	13/16	1/4
F3208-32X13/16	8	32	4.17	13/16	1/4
F3208-32X1	8	32	4.17	1"	3/8
F32010-24X13/16	10	24	4.83	13/16	1/4
F32010-24X1	10	24	4.83	1"	3/8
F32012-24X13/16	12	24	5.49	13/16	1/4
F3201/4X13/16	1/4	20	6.35	13/16	1/4
F3201/4X1	1/4	20	6.35	1"	3/8
F3201/4X1.5/16	1/4	20	6.35	1.5/16	7/16
F3201/4X1.1/2	1/4	20	6.35	1.1/2	1/2
F3205/16X1	5/16	18	7.94	1"	3/8
F3205/16X1.1/2	5/16	18	7.94	1.1/2	1/2
F3203/8X1	3/8	16	9.53	1"	3/8
F3203/8X1.5/16	3/8	16	9.53	1.5/16	7/16


Product	TDZ	TPI	TD	BD	OAL
			(mm)	(inch)	(inch)
F3203/8X1.1/2	3/8	16	9.53	1.1/2	1/2
F3207/16X1.5/16	7/16	14	11.11	1.5/16	7/16
F3207/16X1.1/2	7/16	14	11.11	1.1/2	1/2
F3201/2X1.5/16	1/2	13	12.70	1.5/16	7/16
F3201/2X1.1/2	1/2	13	12.70	1.1/2	1/2
F3201/2X2	1/2	13	12.70	2"	5/8
F3209/16X1.1/2	9/16	12	14.29	1.1/2	1/2
F3205/8X1.1/2	5/8	11	15.88	1.1/2	1/2
F3205/8X2	5/8	11	15.88	2"	5/8
F3203/4X1.1/2	3/4	10	19.05	1.1/2	1/2
F3203/4X2	3/4	10	19.05	2"	5/8
F3207/8X2	7/8	9	22.23	2"	5/8
F3201X2	1"	8	25.40	2"	5/8
F3201.1/8X3	1.1/8	7	28.58	3"	7/8
F3201.1/4X3	1.1/4	7	31.75	3"	7/8

F330



HSS Adjustable Split Hand Die, UNF, Right Hand

Split die to produce external thread by hand in multiple passes, adjusting each pass. By tightening the die stock holder, different classes of thread fit can be achieved - tight, regular or loose fit. Slightly tightened in the holder it can be used to clean up or produce a partial thread.



UNF	BS 1127:1950	1.75 XP
HSS	R	Bright

Workpiece material group suitability and starting values for cutting speed (m/min).

P1.1 ■ 12	P1.2 ■ 13	P1.3 ■ 14	P2.1 ■ 10	P2.2 ■ 9	P2.3 ■ 8	P3.1 ■ 8	P3.2 ■ 7	P4.1 ■ 5	M1.1 ■ 7	M1.2 ■ 6	M2.1 ■ 6	M2.2 ■ 5	K1.1 ■ 11
K1.2 ■ 8	K1.3 ■ 6	K2.1 ■ 11	K2.2 ■ 9	K2.3 ■ 7	K3.1 ■ 10	K3.2 ■ 8	K3.3 ■ 6	K5.1 ■ 10	K5.2 ■ 8	K5.3 ■ 6	N1.1 ■ 20	N1.2 ■ 15	N1.3 ■ 10
N2.1 ■ 10	N2.2 ■ 9	N2.3 ■ 6	N3.1 ■ 11	N3.2 ■ 6	N3.3 ■ 3	N4.1 ■ 11	N4.2 ■ 4	N4.3 ■ 4					

Products from this series are also available in set with taps. Please see L120.

Product	TDZ	TPI	TD	BD	OAL
F3304-48X13/16	4	48	2.85	13/16	1/4
F3305-44X13/16	5	44	3.18	13/16	1/4
F3306-40X13/16	6	40	3.51	13/16	1/4
F3308-36X13/16	8	36	4.17	13/16	1/4
F33010-32X13/16	10	32	4.83	13/16	1/4
F33010-32X1	10	32	4.83	1"	3/8
F33012-28X13/16	12	28	5.49	13/16	1/4
F3301/4X13/16	1/4	28	6.35	13/16	1/4
F3301/4X1	1/4	28	6.35	1"	3/8
F3301/4X1.1/2	1/4	28	6.35	1.1/2	1/2
F3305/16X1	5/16	24	7.94	1"	3/8
F3305/16X1.5/16	5/16	24	7.94	1.5/16	7/16
F3305/16X1.1/2	5/16	24	7.94	1.1/2	1/2
F3303/8X1	3/8	24	9.53	1"	3/8
F3303/8X1.5/16	3/8	24	9.53	1.5/16	7/16
F3303/8X1.1/2	3/8	24	9.53	1.1/2	1/2


Product	TDZ	TPI	TD	BD	OAL
F3307/16X1	7/16	20	11.11	1"	3/8
F3307/16X1.5/16	7/16	20	11.11	1.5/16	7/16
F3307/16X1.1/2	7/16	20	11.11	1.1/2	1/2
F3301/2X1.5/16	1/2	20	12.70	1.5/16	7/16
F3301/2X1.1/2	1/2	20	12.70	1.1/2	1/2
F3309/16X1.5/16	9/16	18	14.29	1.5/16	7/16
F3309/16X1.1/2	9/16	18	14.29	1.1/2	1/2
F3305/8X1.1/2	5/8	18	15.88	1.1/2	1/2
F3305/8X2	5/8	18	15.88	2"	5/8
F3303/4X1.1/2	3/4	16	19.05	1.1/2	1/2
F3303/4X2	3/4	16	19.05	2"	5/8
F3307/8X2	7/8	14	22.23	2"	5/8
F3301X2	1"	12	25.40	2"	5/8
F3301.1/8X3	1.1/8	12	28.58	3"	7/8
F3301.1/4X3	1.1/4	12	31.75	3"	7/8
F3301.1/2X3	1.1/2	12	38.10	3"	7/8

F370



HSS Adjustable Split Hand Die, G(BSP) Right Hand

Split die to produce external thread by hand in multiple passes, adjusting each pass. By tightening the die stock holder, different classes of thread fit can be achieved - tight, regular or loose fit. Slightly tightened in the holder it can be used to clean up or produce a partial thread.



	BS 1127:1950	1.75 XP
HSS		Bright

Workpiece material group suitability and starting values for cutting speed (m/min).

P1.1 ■ 12	P1.2 ■ 13	P1.3 ■ 14	P2.1 ■ 10	P2.2 ■ 9	P2.3 ▣ 8	P3.1 ■ 8	P3.2 ▣ 7	P4.1 ▣ 5	M1.1 ■ 7	M1.2 ■ 6	M2.1 ■ 6	M2.2 ▣ 5	K1.1 ■ 11
K1.2 ■ 8	K1.3 ▣ 6	K2.1 ■ 11	K2.2 ■ 9	K2.3 ▣ 7	K3.1 ■ 10	K3.2 ■ 8	K3.3 ▣ 6	K5.1 ■ 10	K5.2 ■ 8	K5.3 ▣ 6	N1.1 ▣ 20	N1.2 ▣ 15	N1.3 ▣ 10
N2.1 ▣ 10	N2.2 ▣ 9	N2.3 ▣ 6	N3.1 ■ 11	N3.2 ▣ 6	N3.3 ▣ 3	N4.1 ▣ 11	N4.2 ▣ 4	N4.3 ▣ 4					

Product	TDZ	TPI	TD		BD		OAL
			(mm)	(inch)	(inch)	(inch)	
F3701/8X1	1/8	28	9.73	1"	3/8		
F3701/4X1.5/16	1/4	19	13.16	1.5/16	7/16		
F3703/8X1.1/2	3/8	19	16.66	1.1/2	1/2		
F3701/2X2	1/2	14	20.96	2"	5/8		
F3705/8X2	5/8	14	22.91	2"	5/8		
F3703/4X2	3/4	14	26.44	2"	5/8		
F3707/8X2.1/4	7/8	14	30.20	2.1/4	11/16		
F3701X2.1/4	1"	11	33.25	2.1/4	11/16		
F3701.1/4X3	1.1/4	11	41.91	3"	7/8		
F3701.1/2X4	1.1/2	11	47.80	4"	1"		




F202



HSS Die Nut Metric, Right Hand

Hexagon die nut designed to repair or clean out damaged external threads by re-cutting the original thread form by hand. A wrench or spanner can be used to rotate the die nut around the outside of the bolt, thus it can be used in difficult to access locations.

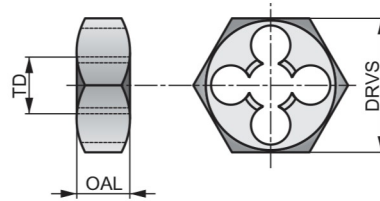

M	DIN 382	6g
1.75 XP	HSS	R
Bright		

Workpiece material group suitability and starting values for cutting speed (m/min).

P1.1 ■ 12	P1.2 ■ 13	P1.3 ■ 14	P2.1 ■ 10	P2.2 ■ 9	P2.3 ▧ 8	P3.1 ■ 8	P3.2 ▧ 7	P4.1 ▧ 5	M1.1 ■ 7	M1.2 ■ 6	M2.1 ■ 6	M2.2 ▧ 5	K1.1 ■ 11
K1.2 ■ 8	K1.3 ▧ 6	K2.1 ■ 11	K2.2 ■ 9	K2.3 ▧ 7	K3.1 ■ 10	K3.2 ■ 8	K3.3 ▧ 6	K5.1 ■ 10	K5.2 ■ 8	K5.3 ▧ 6	N1.1 ▧ 20	N1.2 ▧ 15	N1.3 ▧ 10
N2.1 ▧ 10	N2.2 ▧ 9	N2.3 ▧ 6	N3.1 ■ 11	N3.2 ▧ 6	N3.3 ▧ 3	N4.1 ▧ 11	N4.2 ▧ 4	N4.3 ▧ 4					


Product	TD (mm)	TP (mm)	DRVS (mm)	OAL (mm)
F202M3	3.00	0.50	19.00	5.0
F202M4	4.00	0.70	19.00	5.0
F202M5	5.00	0.80	19.00	7.0
F202M6	6.00	1.00	19.00	7.0
F202M8	8.00	1.25	22.00	9.0
F202M10	10.00	1.50	27.00	11.0
F202M12	12.00	1.75	36.00	14.0
F202M14	14.00	2.00	36.00	14.0
F202M16	16.00	2.00	41.00	18.0
F202M18	18.00	2.50	41.00	18.0
F202M20	20.00	2.50	41.00	18.0
F202M22	22.00	2.50	50.00	22.0
F202M24	24.00	3.00	50.00	22.0
F202M27	27.00	3.00	60.00	25.0
F202M30	30.00	3.50	60.00	25.0
F202M36	36.00	4.00	60.00	25.0

F302



HSS Die Nut Metric, Right Hand

Hexagon die nut designed to repair or clean out damaged external threads by re-cutting the original thread form by hand. A wrench or spanner can be used to rotate the die nut around the outside of the bolt, thus it can be used in difficult to access locations.

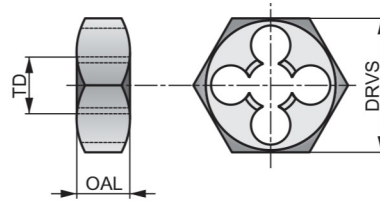

M	BS 1127:1950	6g
1.75 XP	HSS	R
Bright		

Workpiece material group suitability and starting values for cutting speed (m/min).

P1.1 ■ 12	P1.2 ■ 13	P1.3 ■ 14	P2.1 ■ 10	P2.2 ■ 9	P2.3 ■ 8	P3.1 ■ 8	P3.2 ■ 7	P4.1 ■ 5	M1.1 ■ 7	M1.2 ■ 6	M2.1 ■ 6	M2.2 ■ 5	K1.1 ■ 11
K1.2 ■ 8	K1.3 ■ 6	K2.1 ■ 11	K2.2 ■ 9	K2.3 ■ 7	K3.1 ■ 10	K3.2 ■ 8	K3.3 ■ 6	K5.1 ■ 10	K5.2 ■ 8	K5.3 ■ 6	N1.1 ■ 20	N1.2 ■ 15	N1.3 ■ 10
N2.1 ■ 10	N2.2 ■ 9	N2.3 ■ 6	N3.1 ■ 11	N3.2 ■ 6	N3.3 ■ 3	N4.1 ■ 11	N4.2 ■ 4	N4.3 ■ 4					


Product	TD	TP	DRVS	OAL
	(mm)	(mm)	(inch)	(inch)
F302M3	3.00	0.50	0.7100	1/4
F302M4	4.00	0.70	0.7100	1/4
F302M5	5.00	0.80	0.7100	1/4
F302M6	6.00	1.00	0.7100	1/4
F302M7	7.00	1.00	0.8200	5/16
F302M8	8.00	1.25	0.8200	5/16
F302M10	10.00	1.50	0.9200	3/8
F302M11	11.00	1.50	1.0100	7/16
F302M12	12.00	1.75	1.1000	1/2
F302M14	14.00	2.00	1.3000	5/8
F302M16	16.00	2.00	1.3000	5/8
F302M18	18.00	2.50	1.4800	11/16
F302M20	20.00	2.50	1.4800	11/16
F302M22	22.00	2.50	1.6700	13/16
F302M24	24.00	3.00	2.0500	15/16
F302M27	27.00	3.00	2.2200	1.1/16
F302M30	30.00	3.50	2.2200	1.1/16
F302M33	33.00	3.50	2.5800	1.1/8
F302M36	36.00	4.00	2.7600	1.1/4

F312



HSS Die Nut Metric Fine, Right Hand

Hexagon die nut designed to repair or clean out damaged external threads by re-cutting the original thread form by hand. A wrench or spanner can be used to rotate the die nut around the outside of the bolt, thus it can be used in difficult to access locations.

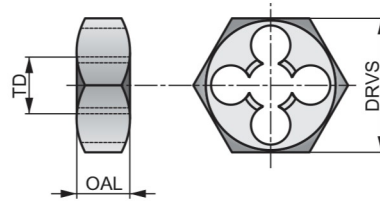

MF	BS 1127:1950	6g
1.75 XP	HSS	R
Bright		

Workpiece material group suitability and starting values for cutting speed (m/min).

P1.1 ■ 12	P1.2 ■ 13	P1.3 ■ 14	P2.1 ■ 10	P2.2 ■ 9	P2.3 ■ 8	P3.1 ■ 8	P3.2 ■ 7	P4.1 ■ 5	M1.1 ■ 7	M1.2 ■ 6	M2.1 ■ 6	M2.2 ■ 5	K1.1 ■ 11
K1.2 ■ 8	K1.3 ■ 6	K2.1 ■ 11	K2.2 ■ 9	K2.3 ■ 7	K3.1 ■ 10	K3.2 ■ 8	K3.3 ■ 6	K5.1 ■ 10	K5.2 ■ 8	K5.3 ■ 6	N1.1 ■ 20	N1.2 ■ 15	N1.3 ■ 10
N2.1 ■ 10	N2.2 ■ 9	N2.3 ■ 6	N3.1 ■ 11	N3.2 ■ 6	N3.3 ■ 3	N4.1 ■ 11	N4.2 ■ 4	N4.3 ■ 4					


Product	TD	TP	DRVS	OAL
	(mm)	(mm)	(inch)	(inch)
F312M8X.75	8.00	0.75	0.8200	5/16
F312M8X1.0	8.00	1.00	0.8200	5/16
F312M10X1.0	10.00	1.00	0.9200	3/8
F312M10X1.25	10.00	1.25	0.9200	3/8
F312M12X1.0	12.00	1.00	1.0100	7/16
F312M12X1.25	12.00	1.25	1.0100	7/16
F312M12X1.5	12.00	1.50	1.0100	7/16
F312M14X1.5	14.00	1.50	1.3000	5/8
F312M16X1.5	16.00	1.50	1.3000	5/8
F312M18X1.5	18.00	1.50	1.4800	11/16
F312M20X1.5	20.00	1.50	1.4800	11/16
F312M22X1.5	22.00	1.50	1.6700	13/16
F312M24X1.5	24.00	1.50	2.0500	15/16
F312M24X2.0	24.00	2.00	2.0500	15/16

F272



HSS Die Nut G(BSP) Right Hand

Hexagon die nut designed to repair or clean out damaged external threads by re-cutting the original thread form by hand. A wrench or spanner can be used to rotate the die nut around the outside of the bolt, thus it can be used in difficult to access locations.

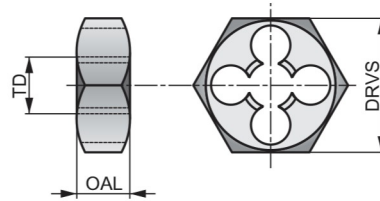

G	DIN 382	Class A
1.75 XP	HSS	R
Bright		

Workpiece material group suitability and starting values for cutting speed (m/min).

P1.1 ■ 12	P1.2 ■ 13	P1.3 ■ 14	P2.1 ■ 10	P2.2 ■ 9	P2.3 ▣ 8	P3.1 ■ 8	P3.2 ▣ 7	P4.1 ▣ 5	M1.1 ■ 7	M1.2 ■ 6	M2.1 ■ 6	M2.2 ▣ 5	K1.1 ■ 11
K1.2 ■ 8	K1.3 ▣ 6	K2.1 ■ 11	K2.2 ■ 9	K2.3 ▣ 7	K3.1 ■ 10	K3.2 ■ 8	K3.3 ▣ 6	K5.1 ■ 10	K5.2 ■ 8	K5.3 ▣ 6	N1.1 ▣ 20	N1.2 ▣ 15	N1.3 ▣ 10
N2.1 ▣ 10	N2.2 ▣ 9	N2.3 ▣ 6	N3.1 ■ 11	N3.2 ▣ 6	N3.3 ▣ 3	N4.1 ▣ 11	N4.2 ▣ 4	N4.3 ▣ 4					

Product	TDZ	TPI	TD		DRVS		OAL
			(mm)	(mm)	(mm)	(mm)	
F2721/8	1/8	28	9.73		27.00		11.0
F2721/4	1/4	19	13.16		36.00		10.0
F2723/8	3/8	19	16.66		41.00		14.0
F2721/2	1/2	14	20.96		41.00		14.0
F2723/4	3/4	14	26.44		60.00		18.0
F2721	1"	11	33.25		60.00		18.0
F2721.1/4	1.1/4	11	41.91		70.00		20.0
F2721.1/2	1.1/2	11	47.80		85.00		22.0